

FA 60 005 06



FA 60 005 08



FA 60 005 12




FA 60 005 15






FA 60 005 20

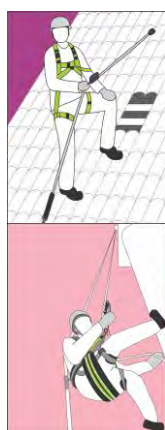

FA 60 005 30



HS CODE
63079098
CARTON SIZE / PCS.
<b>FA 60 005 06</b> : 60 x 40 x 24 cm / 100
<b>FA 60 005 08/12/15/20/30</b> : 40 x 40 x 24 cm / 50
AET (UE) N°2777/10789-01/E01-01
<b>Satra Technology Europe Ltd., N° 2777,</b> Bracetown Business Park, Clonee, Dublin, D15YN2P, Ireland
MODULE D FI14/14003.02
<b>SGS Fimko Oy, N°0598</b> Takomotie 8, 00380 HELSINKI, Finland

REF.	FA 60 005 XX
CE	EN 795:2012 Type B EN 566
	x1
LG.	0.6 m   0.8 m   1.2 m   1.5 m   2.0 m   3.0 m
MAT.	 20 mm PES
R (kN) / MBS (kN)	22 kN / 30 kN
	0.07 kg   0.09 kg   0.13 kg   0.16 kg   0.21 kg   0.33 kg



**Nombre d'utilisateurs**  
 Number of users  
**Cantidad de usuarios**  
 Quantità di utilizzatori  
 Anzahl der Benutzer

**R (kN) / MBS (kN)**

**Résistance statique (en kN) / Résistance à la rupture**  
 Static strength / Minimum Breaking Strength  
**Resistencia estática (en kN) / Resistencia a la ruptura (en kN)**  
 Resistenza statica (in kN) / Resistenza alla rottura (in kN)  
 Statische Festigkeit (in kN) / Bruchfestigkeit (in kN)