

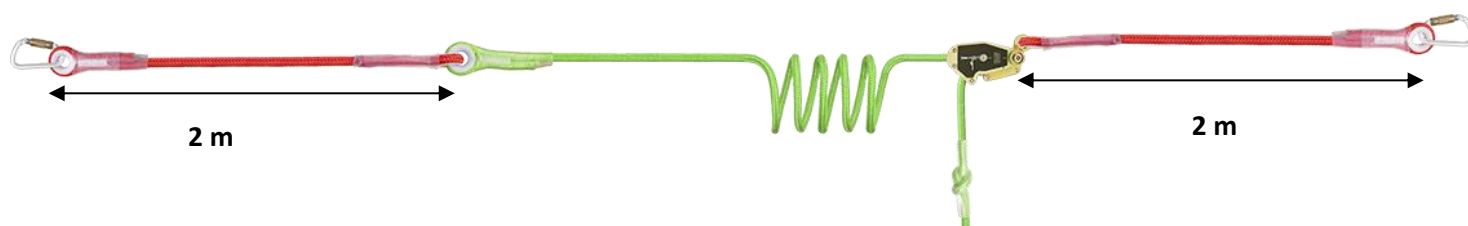


POST LINE



FA 60 007 03
 +
 2x FA 60 032 00
 +
 FA 60 901 06

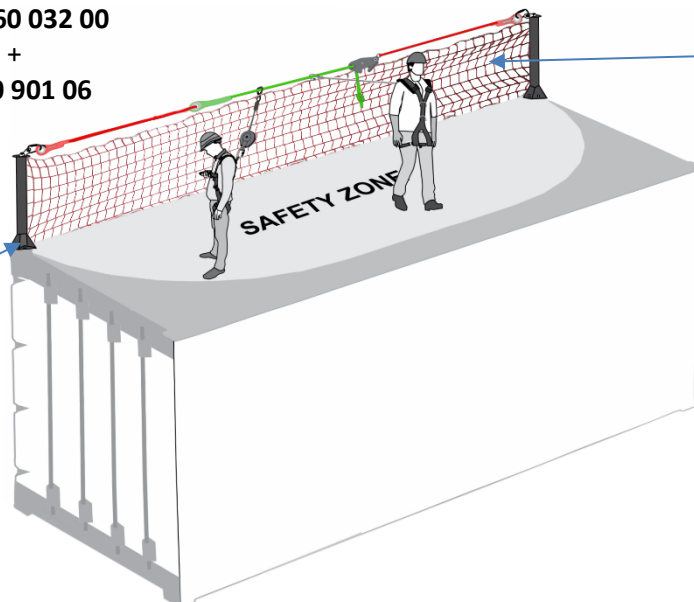


FA 60 901 06
 (not included)









FA 60 032 00
 (not included)

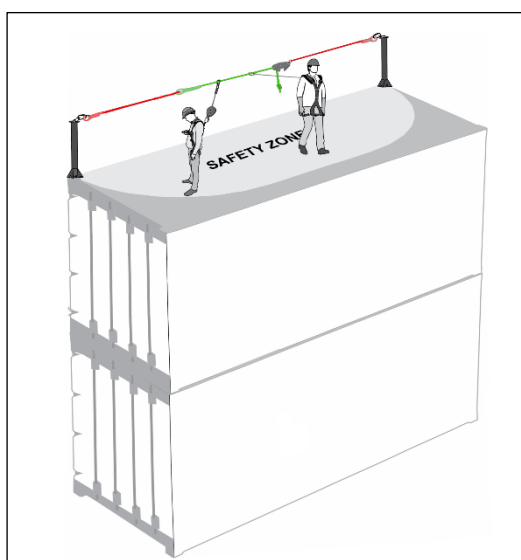

Transport bag
 included



HS CODE
63079098
CARTON SIZE / PCS.
40 x 40 x 24 cm / 1
AET (UE) N°2777/13802-02/E01-01
Satra Technology Europe Ltd., N° 2777, Bracetown Business Park, Clonee, Dublin, D15YN2P, Ireland
MODULE D FI14/14003.01
SGS Fimko Oy, N°0598 Takomotie 8, 00380 HELSINKI, Finland

REF.	FA 60 007 03
CE	PPE regulation (EU) 2016/425 Annex II using EN 795 Type C TS 16415 Type C
	x2
MAT.	 16 mm PES
R (kN) / MBS (kN)	18 kN / 23 kN
MAT. 	
LG. / f MIN. → MAX.	5.0 m → 14.0 m / 1.40 m → 2.80 m
	ISO Container (10'/20'/40')
+	FA 60 032 00 (x2) FA 60 901 06
	14.11 KG



R (kN) / MBS (kN)

Nombre d'utilisateurs
Number of users
Cantidad de usuarios
Quantità di utilizzatori
Anzahl der Benutzer

Résistance statique (en kN) / Résistance à la rupture
Static strength / Minimum Breaking Strength
Resistencia estática (en kN) / Resistencia a la ruptura (en kN)
Resistenza statica (in kN) / Resistenza alla rottura (in kN)
Statische Festigkeit (in kN) / Bruchfestigkeit (in kN)



LG. / f MIN. MAX.

Matière connecteur / tendeur
Material of connector / tensioner
Material del conector / tensor
Materia del connettore / tenditore
Material Verbinder / Spanner

Longueur mini → maxi / Flèche mini → maxi
Min. → Max. length / Min. → Max. deflection
Longitud mínima → máxima / Flecha mínima → máxima
Lunghezza min. → max. / Flessione min. → max.
Länge min. → max. / Dirchhang min. → max.

+

Peut être utilisé avec
Can be used with
Se puede usar con
Ad essere utilizzato con
Verwendet werden soll mit